




Standard rail clip

FM24

1. RAIL WITHOUT PAD

2. PAD MOUNTED RAIL

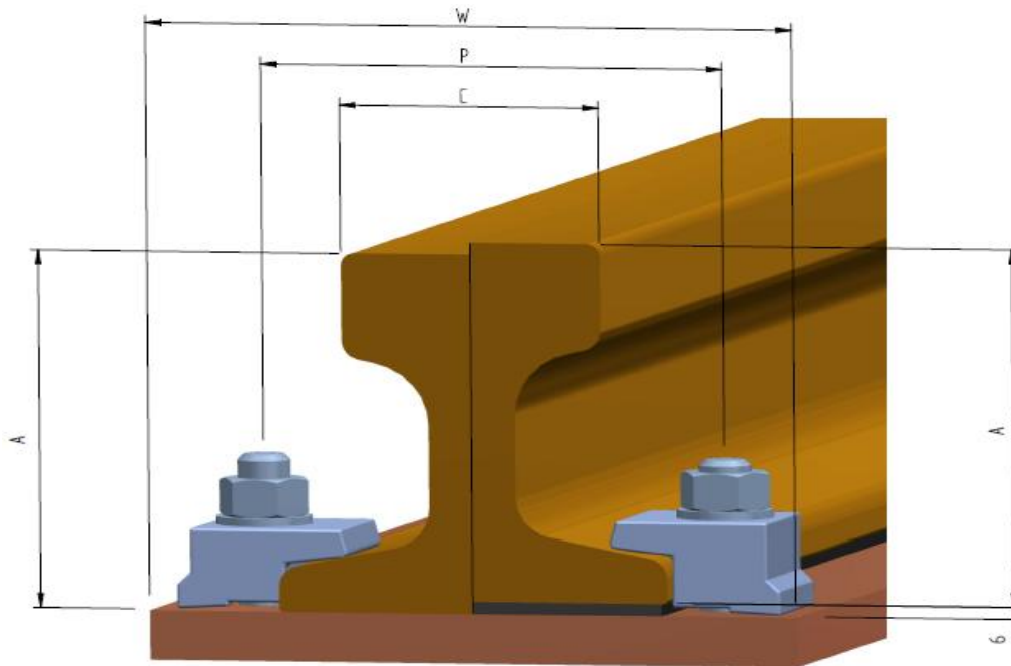

	Distance between stud M24			P	Rail base + 34	[mm]	
	Minimum assembly width clips			W	Rail base + 100	[mm]	
	Nominal width sole plate with anchorbolts			W	Rail base + 120	[mm]	
	F	C	A				
	[mm]	[mm]	[mm]				
			1. RAIL WITHOUT PAD		2. PAD MOUNTED RAIL		
A120	220	120	105	FM24 H31	FM24 H37		
A150	220	150	150	FM24 H34	FM24 H40		
AS86	150	101,6	152,4	FM24 H34	FM24 H40		
PRI85r	152,4	101,6	152,4	FM24 H34	FM24 H40		
MRS87A	152,4	101,6	152,4	FM24 H34	FM24 H40		
MRS125	180	120	180	FM24 H40	FM24 H46		
BSC101	165	100	155	FM24 H34	FM24 H40		
ISCR100	150	100	150	FM24 H31	FM24 H37		
ISCR120	170	120	170	FM24 H34	FM24 H40		
ISCR140	170	140	170	FM24 H40	FM24 H46		
QU100	150	100	150	FM24 H31	FM24 H37		
QU120	170	120	170	FM24 H34	FM24 H40		

Specification	Grade 5.8 Stud bolt	Grade 8.8 Stud bolt
Maximum side load	77 kN	125 kN
Tightening torque	370 Nm	600 Nm



This document is owned by BEMO RAIL, it may neither be copied nor submitted to third parties without permission.

Debbemeerweg 59
1749 DK Warmenhuizen
Tel.: +31 (0)226 - 425300
E-mail: info@bemorail.nl