




# Adjustable rail clip

# AM24

1. RAIL WITHOUT PAD

2. PAD MOUNTED RAIL

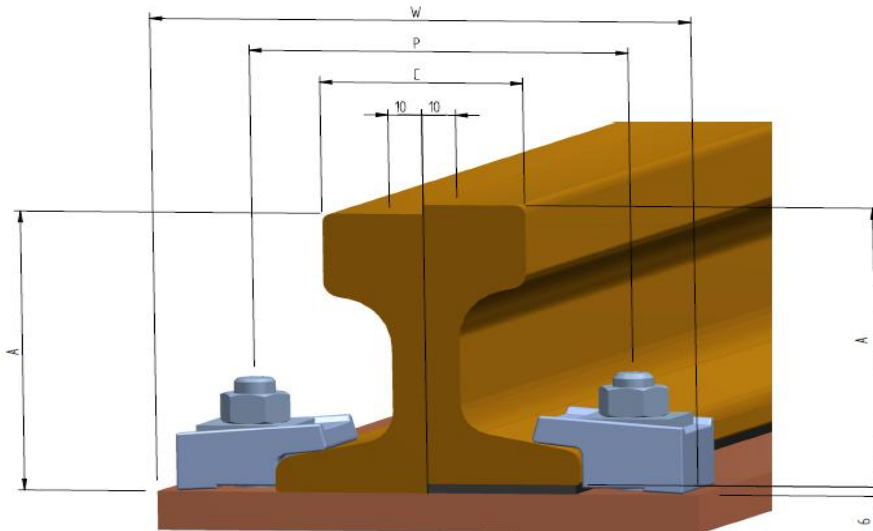

	Distance between stud M24		P	Rail base + 44	[mm]	
	Minimum assembly width clips		W	Rail base + 140	[mm]	
	Nominal width sole plate with anchorbolts		W	Rail base + 140	[mm]	
	<b>F</b>	<b>C</b>	<b>A</b>	<b>1. RAIL WITHOUT PAD</b>	<b>2. PAD MOUNTED RAIL</b>	
	[mm]	[mm]	[mm]			
A120	220	120	105	AM24 H24	AM24 H30	
A150	220	150	150	AM24 H27	AM24 H33	
AS86	150	101,6	152,4	AM24 H27	AM24 H33	
PRI85r	152,4	101,6	152,4	AM24 H27	AM24 H33	
MRS87A	152,4	101,6	152,4	AM24 H27	AM24 H33	
MRS125	180	120	180	AM24 H33	AM24 H39	
BSC101	165	100	155	AM24 H27	AM24 H33	
ISCR100	150	100	150	AM24 H24	AM24 H30	
ISCR120	170	120	170	AM24 H27	AM24 H33	
ISCR140	170	140	170	AM24 H33	AM24 H39	
QU100	150	100	150	AM24 H24	AM24 H30	
QU120	170	120	170	AM24 H27	AM24 H33	

Specification	Grade 5.8 Stud bolt	Grade 8.8 Stud bolt
Maximum side load	77 kN	125 kN
Tightening torque	370 Nm	600 Nm



This document is owned by BEMO RAIL, it may neither be copied nor submitted to third parties without permission.

Debbemeerweg 59  
1749 DK Warmenhuizen  
Tel.: +31 (0)226 - 425300  
E-mail: info@bemorail.nl